

specifications for bi-fold garage doors




triple up-and-over rondo automated garage doors / iroko / stainless steel inserts

Overall Frame Sizes

- Maximum structural opening – 4600mm x 2400mm high

Characteristics

- 2+2 side folding door wings, outward or inward opening
- Available in all of our standard E80 Range door designs and all wood
- e80 Range, steel reinforced, insulated and fully weather sealed
- Available only as an automated option
- Steel reinforced for extra stability and high security
- 80mm thick with overall frame size
- 3D concealed hinges†
- 39mm ventilated paraffin insulation especially designed to prevent moisture build up and eliminate warping
- Door leaf producing an insulation value of 1.1w/m2k
- Hardwood laminated frame sections 115 x 70mm
- Automated – locked and secured by automation
- Available in all woods and designs
- CE marked to EN14351-1

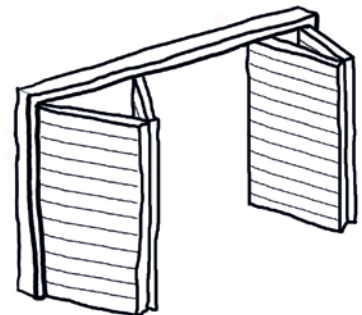



Limitations on Passage Area

- Outward opening – 500mm reduction on each side
- Inward opening – 250mm reduction on each side

Finishing

- Supplied with either clear UV protection lacquer or clear UV protection oil. Maintenance required depending on exposure


Guarantees*

- 5 Year manufacturing warranty on Doorset
- 1 Year Motor manufacturer warrantee on Motor

**Please refer to our terms & conditions*



automated motor

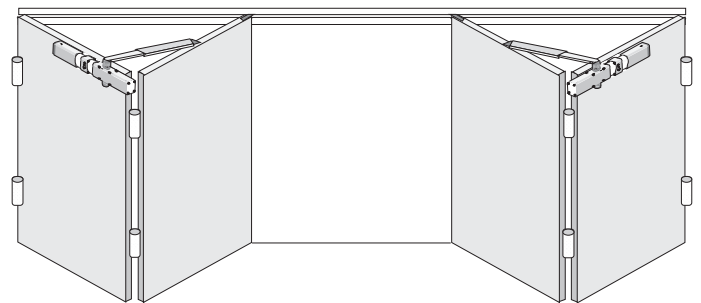

sample of inward opening